

INSTALLATION INSTRUCTIONS FLEXIBLE MOULDINGS

UM303 - 12/2018

INSTALLATIE VAN FLEXIBELE LIJSTEN | INSTALLATION DES MOULURES FLEXIBLES |
INSTALLATION VON FLEXIBELE LEISTEN | INSTALACIÓN MOLDURAS FLEXIBLE |
ИНСТРУКЦИЯ ПО УСТАНОВКЕ ГИБКИЕ ПРОФИЛИ

Ready? Set? Go!



**INSTALLATION
GUARANTEE**

ORAC nv/sa
Biekorfstraat 32
8400 Oostende, Belgium
T +32 59 80 32 52
info@oracdecor.com

ORAC
DECOR

1 Ready?

ATMOSPHERE & SURFACE



Storage and installation conditions: Store profiles and adhesives at room temperature and wait 24 hours before installing.

Opslag- en plaatsingsvoorwaarden: Plaats profielen en lijmen 24 uur vóór de installatie op kamertemperatuur.

Conditions d'installation et de stockage: Stockez les profils et les colles à température ambiante 24 heures avant la pose.

Lager- und Installationsbedingungen: Profile und Kleber 24 Stunden vor Verlegung bei Zimmertemperatur lagern.

Condiciones de almacenamiento y de instalación: Colocar molduras y adhesivos en el lugar 24 horas antes de la aplicación.

Условия хранения и монтажа: Оставьте профили и клей в комнате, которой планируется монтаж, на 24 часа.



Dust free
Stofvrij
Sans poussière
Staubfrei
Libre de polvo
Удалите пыль



Sand and wash surface
Schoor en reinig de ondergrond
Poncez et nettoyez la surface
Schleifen und reinigen Sie den Untergrund
Superficie lisa y limpia
Очистите поверхность



Flat wall & ceilings
Vlakte wand en plafond
Mur et plafond plats
Plane Wand und Decke
Paredes y techos lisos
Выровняйте стены и потолки



Dry
Droog
Sec
Trocken
Seco
Высушите



No grease
Vetvrij
Sans graisse
Fettfrei
Sin grasa
Обезжирьте

2 Set?

DECOFIX ADHESIVES



Interior, porous and dry surface
Binnen, poreuze en droge ondergronden
Pose à l'intérieur, surfaces poreuses, pièces non humides
Innen, poröse/saugfähig, und trockene Untergründe
Interior, superficies porosas y secas
Для внутренних работ, пористых и сухих поверхностей



Heavy profile
Zware lijsten
Grandes mouyures
Grosse Profilen
Perfiles Pesados
Тяжелые профили



Exterior, non-porous and humid surface
Buiten, niet-poreuze en vochtige ondergronden
Pose à l'extérieur, surfaces non poreuses, environnement humide
Außen, nicht-poröser/saugfähige Untergrund und Feuchträume
Exterior, superficies no porosas, ambientes húmedos
Для внешних работ, непористых и влажных профилей



Seal wall/ceiling
Verbinding muur/plafond
Collage mur/plafond
Verbindung Wand/Decke
Adherencia techos/paredes
Установите на потолок и/или стену



DecoFix Pro
Strong, water-based acrylic installation adhesive

FDP500 310ml | 7 > 8m
FDP600 4200ml | 65 > 110m



or
of | ou |
oder | o



DecoFix Power
Very strong MS-Polymer-based installation adhesive

FDP700 290 ml | 7 > 8m



Joints between mouldings*
Verbinding tussen profielen
oints entre les profils
Nähtverbindungen zwischen Profilen
Uniones de los perfiles
Стыки между профилями



DecoFix Extra
Polyurethane-based adhesive


FX200 310ml | min. 80m
FX210 tube 80ml | min. 20m





* For Durofoam®: Use DecoFix Pro for joints
Voor Durofoam®: gebruik DecoFix Pro voor de naden
Pour Durofoam®: utilisez DecoFix Pro pour les joints
Für Durofoam®: verwenden Sie DecoFix Pro für die Stoßstellen
Para Durofoam®: utilice DecoFix Pro para las uniones entre piezas
Для Durofoam®: используйте монтажный клей DecoFix Pro для стыков

3 Go!

ONLY FULL GUARANTEE WITH DECOFIX
 VOLLEDIGE GARANTIE ENKEL BIJ GEBRUIK VAN DECOFIX
 GARANTIE TOTALE UNIQUEMENT AVEC COLLE DECOFIX
 VOLLSTÄNDIGE GARANTIE NUR BEI DER VERWENDUNG VON DECOFIX
 GARANTÍA COMPLETA SÓLO SI SE UTILIZA DECOFIX
 ГАРАНТИЯ НА ПРОДУКЦИЮ ДЕЙСТВУЕТ ТОЛЬКО ПРИ ИСПОЛЬЗОВАНИИ КЛЕЯ DECOFIX



WWW.ORACDECOR.COM/
 INSTALLATION

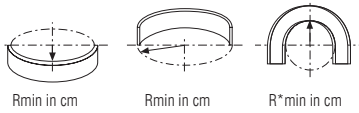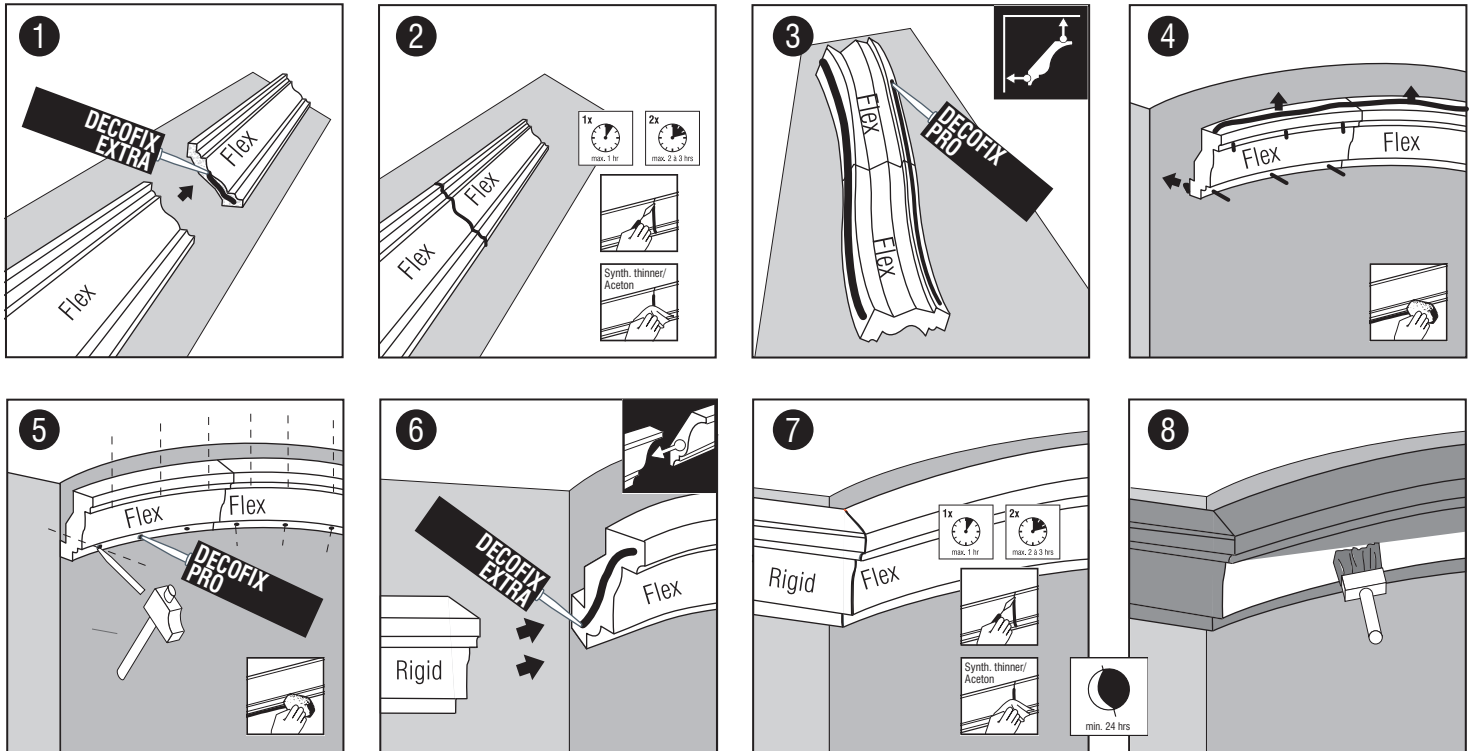

Flexible Mouldings

Flex Radius	Rmin in cm	R* min in cm
C200F	160	
C201F	200	
C211F	250	
C212F	120	
C213F	280	
C214F	140	
C215F	160	
C216F	340	
C217F	380	
C218F	360	
C220F	400	
C230F	150	
C240F	270	
C250F	70	
C260F	130	
C301F	320	
C302F	250	
C303F	180	
C304F	250	
C308F	120	
C321F	140	
C322F	160	
C331F	420	

Flex Radius	Rmin in cm	R* min in cm
C333F	300	
C334F	380	
C339F	380	
C341F	400	
C373F	100	
C374F	130	
C402F	300	
C602F	100	
C901F	600	
C902F	600	
CX100F	200	
CX106F	360	
CX109F	160	
CX110F	180	
CX123F	280	
CX124F	160	
CX127F	240	
CX132F	70	
CX148F	180	
CX188F	110	
CX189F	90	
CX190F	30	130
DX174F	60	300

Flex Radius	Rmin in cm	R* min in cm
P1020F	30	80
P2020F	30	80
P3020F	50	180
P4020F	40	200
P5020F	30	
P5021F	20	70
P6020F	30	250
P7010F	20	
P7020F	30	
P7030F	30	250
P7040F	40	320
P7070F	30	230
P8020F	40	130
P8030F	20	70
P8040F	30	
P8050F	80	200
P8060F	80	200
P9010F	40	310
P9020F	30	
P9040F	30	80
P9050F	20	60
P9900F	20	250
P9901F	20	180

Flex Radius	Rmin in cm	R* min in cm
PX103F	20	80
PX120F	30	110
PX144F	20	220
PX175F	30	80
SX104F	40	
SX105F	30	
SX118F	40	
SX137F	40	
SX138F	40	
SX155F	30	
SX157F	35	260
SX162F	20	80
SX163F	35	
SX165F	40	
SX172F	35	
SX173F	45	
SX179F	35	
SX180F	45	
SX182F	35	
SX183F	40	
SX184F	45	
SX187F	40	